



Budenberg



Made in Britain

Unit B2, Stuart Road,
Altrincham Business Park,
Altrincham WA14 5GJ,
United Kingdom.

budenberg.co.uk
sales@budenberg.co.uk
+44 (0)161 777 7300

Model: 15P

The model 15P is manufactured to meet the demand for small high quality gauges designed for applications using gases, water or any liquid that does not attack brass and bronze.

The one piece polycarbonate case with integral window forms a solid baffle in front of the Bourdon tube and incorporates a full diameter stainless steel blow-out back so that in the event of a tube failure through corrosion, explosion or gross over pressure any vapour or debris is vented from the back of the case.

This gauge is designed for direct mounting on to the process pipe work and comes with a grey inner sleeve to give a grey colour to the side of the case.

For oxygen applications these gauges must be manufactured to ensure they are entirely free from oil and grease.

Size

63 mm & 80mm Dial
diameter

Mounting

Direct

Case & Bezel

One Piece Polycarbonate, Safety Pattern type
case

Scale Ranges

0 to 300mBar, up to 0 to 400 Bar Pressure
Equivalent units of pressure / vacuum available
Single and dual scales are available

Pressure Element

Phosphor Bronze tube soldered to brass connection and
end piece.
Stainless Steel above 40 Bar.
Stainless Steel below 1 bar.

Pressure Connection

1/4" BSP as Standard
1/8" BSP & NPT are also
available

Accuracy Class

CL:1 1.0% of FSD as defined in
EN837-1

Temperature

Operating: -20 to +90 °C
Storage: -40 up to +100 °C
Options: for lower or higher operating temperatures,
please contact our Sales Office

Temperature Effect

Variation in indication caused by temperature shall not
exceed $\pm 0.04 \times (t_2 - t_1)\%$ of the span where:
t1 is the reference ambient temperature in degrees Celsius
t2 is the ambient temperature in degrees Celsius

Overload

115%

SMALL DIAL INDUSTRIAL SERVICE GAUGE



Dial

White Anodised Aluminium marked in black finish
Option: Dual scale, colour bands & sectors
Customisation with Company Name & Logo also
available

Pointer

Stainless steel coloured
black

Movement

Brass Construction
Option : Viscous Damped movement to overcome the
effects of minor pressure pulsations and vibrations

Window

One Piece
Polycarbonate

Environmental Rating

IP54 as defined in EN 60
529

Traceability

All instruments are individually calibrated and have an
unique Serial Number printed on the dial. A Certificate of
Conformity Traceable to National Standards is Supplied
Free of Charge

Certification available


BS EN 10204 3.1B Material
Certification Point by Point Test
Certificate

Safety

All units are manufactured to comply with EN 837-1,
S3 specification and other regulatory standards
including PED.

Installation instructions

Refer to EN 837-2

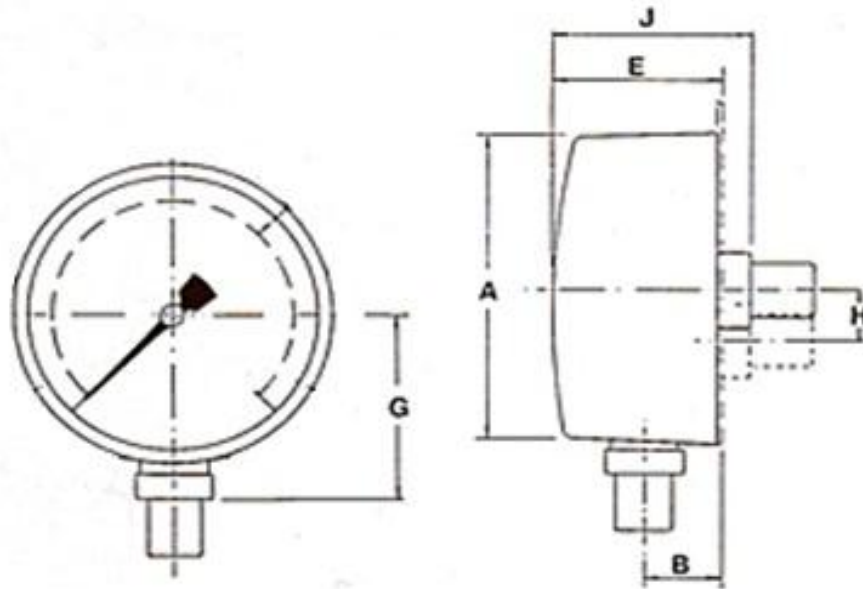

Model No	A	B	E	F	G	Weight
63mm Polycarbonate Case	68mm	14mm	36.5mm	110mm	44.5mm	0.2kg
80mm Polycarbonate Case	86mm	19mm	42mm	153mm	51.5mm	0.3kg

Model No	H	J
63mm Polycarbonate Case	13.5mm	45mm
80mm Polycarbonate Case	13.5mm	46mm

Options

- Case : Customer Name or Logo
- Mounting : See other Datasheets for various mountings
- Threads : NPT available
- Dials : Colour sectors

Accessories

For high temperature applications such as steam, see our range of syphons and adaptors. – See separate Datasheet.
Brass shut off cocks

Specifications and dimensions in this leaflet, are subject to change without prior notice.



Budenberg Gauge Co. Ltd.

Unit B2, Stuart Road,
Altrincham Business Park,
Altrincham WA14 5GJ,
United Kingdom.

Tel: +44 161 777 7300.
Email: sales@budenberg.co.uk
Website: www.budenberg.co.uk

Budenberg Gauge Pvt. Ltd.

299-300, IInd Main Road,
Nehru Nagar,
Old Mahabalipuram Road (OMR) ,
Chennai - 600 096,
Tamil Nadu , India

Tel : +91 44 24541074
Tel/Fax: +91 44 24541075
Email: sales@budenberg-gauge.in

Budenberg Gauge Asia Pacific Ltd

Unit 7A G/F Cheung Fat Ind
Bldg 64-76 Larch St Tai Kok
Tsui Kln
Hong Kong

Tel : +852 3709 0020
Email: sales@budenberg-gauge.asia

Budenberg Middle East LLC

PO Box 18980
Dubai
United Arab Emirates

Tel: +971 4 2511670
Email: sales@budenberg-me.org